Kinghelm®

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

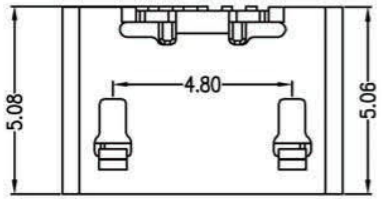

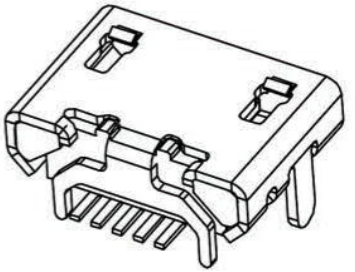

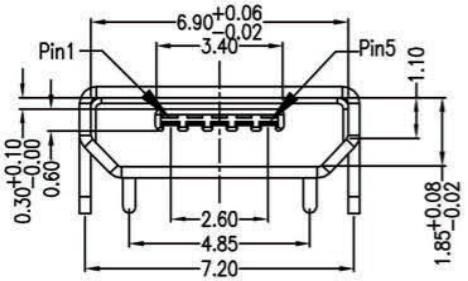







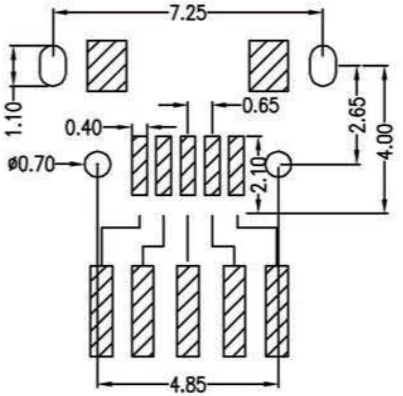

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v−0

1.2 Contact: copper alloy,t=0.15mm

1.3 Shell: copper alloy,t=0.30mm

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 50 mW Max.

2.4 Insulation resistance: 100 MW Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extration cycles

2.7 Temperature range: −30°C~80°C

A 01 S B X X X X X X X 1−067

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

① 产品代号 A:成品

② 产品系列 01:micro usb 5pin

③ 产品类别 S:母座

④ 产品类型 B:B TYPE

⑤ 外壳材质 1:C2680R-H

⑥ 外壳电镀 0:素材;1:Ni100u'';2:雾Sn100u'';3:Ni+Au1u''(脚);4:全Au1u''

⑦ 端子材质 4:C5191R-EH 2:C2680R-EH

⑧ 端子电镀 0:素材;1:全Au1u'';2:全Au1.5u'';3:全Au3u'';4:全Au10u''
5:全Au15u'';6:全Au30u'';7:亮Sn+Au1u'';8:亮Sn+Au3u''
A:雾镍+Au1u'';B:雾镍Au1.5u'';C:雾镍Au3u'';D:雾镍Au5u''

⑨ 主体材质 1:LCP

⑩ 主体颜色 B:黑色 W:白色

⑪ 包装方式 1:吸塑管;2:卷带;4:pe袋

⑫ 下板类型 1:DIP

⑬ 细节流水 067:MIRCO USB 5S B TYPE 四脚全插(牛角型)短针

PART NO: A01SBXXXXXXX1−067	MATERAL: SEE NOTE	深圳市金航标电子有限公司	WWW.BDS666.COM
MODEL NO: XX	FINSH: SEE NOTE	KH-MICRO5P-N	0755-83044319
UNIT: MM / SIZE: A4	COLOR: SEE NOTE	TITLE: MIRCO USB 5S B TYPE 四脚全插(牛角型)短针	
TOLERANCE UNSPECIFIED .x 0.25 .xx 0.15 .xxx 0.10 Ang. 2°	DR: 夏友红	DWG NO: A067	REV: A
	CHK:		
	APP:	SCALE: 5:1 / DATE: 2012.05.02	